

**RoHS COMPLIANCE**

- **Anti-Vandal IK09/ Sealed IP65**
- **Normal Open**
- **Domed/ Flat/ High Flat Front**
- **Stainless Steel/ Brass**
- **1,000,000 cycles momentary**




Momentary: Means that when you push switch and then move your finger, the actuator will back to the original position.


### Order Code

Series	Actuator Options	Terminal	Function	Material Finish	Marking Options
V16	F - Flat H - High B - Domed	P- Pin(2.8x0.5) Screw blank	Momentary: 1- NO 2- NC	G- *Gold N- Nickel A- *Anodized aluminum S- Stainless Steel N- Natural color P- Polished Brushed blank	Custom Markings Available


### Function



### Suggested Panel Cutout

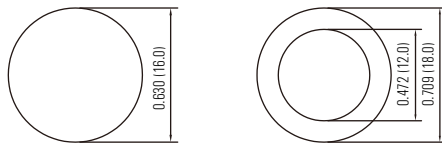

Max. Panel Thickness: 0.236 (6mm)

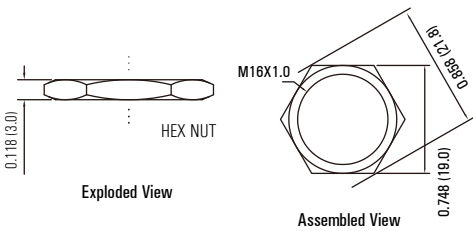


### Technical Data

Type	V16-F	V16-B	V16-H
Front Shape	Flat	Domed	High Flat
Terminal	Screw/ Pin(2.8X0.5)		
Max. Switch Rating	2A 48VDC		
Contact Resistance	≤ 50mΩ		
Insulation Resistance	≥ 1000mΩ		
Dielectric Strength	2000VAC		
Operation Temp.	-20 C ~ +55 C		
Mechanical Life	1,000,000cycles		
Electrical Life	200,000cycles		
Contact Material	Silver Alloy		
Torque	5 ~ 14Nm		
Operation Pressure	approx. 4N		
Protection	IP65/ IK09		
Material			
Actuator	Stainless Steel/ *Gold plated Brass/ *Anodized Aluminum		
Body	Stainless Steel/ Nickel plated brass/ *Gold plated Brass/ *Anodized Aluminum		
Base	PBT		

\*Material can be customized.

### Dimension

#### Screw

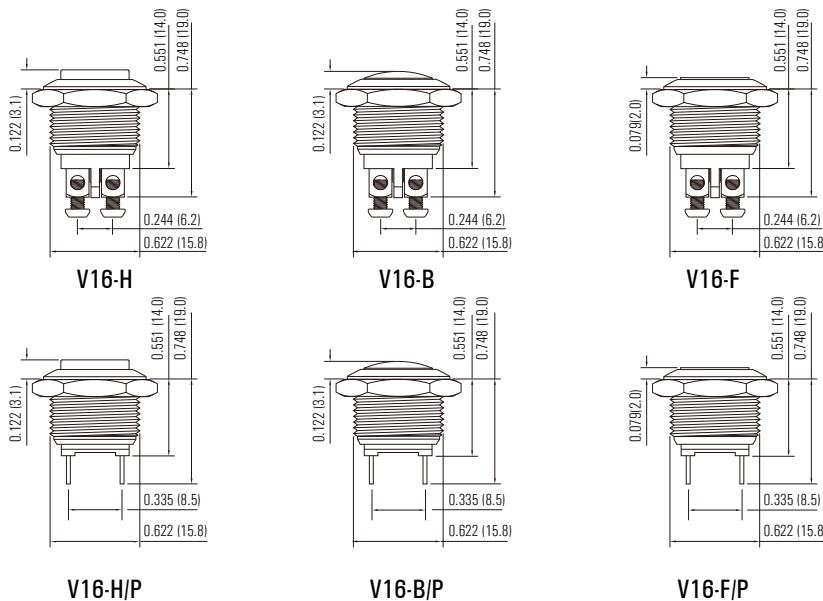

#### Solder

